

FITTING INSTRUCTIONS



THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:


Secondary Alternator Cover Part No. EC-CBR1000-2012-1-GBR / Secondary Clutch Cover Part No. EC-CBR1000-2008-2-GBR / Secondary Pulse Cover Part No. EC-CBR1000-2008-3-GBR / Bullet Frame Race Slider Set - RACE - Part No. FS-CBR1000-2008-R

SECONDARY ALTERNATOR COVER PART NO. EC-CBR1000-2012-1-GBR 1. Remove original fairing panel and plastic cover that is fitted over the original alternator cover. Remove 3 existing bolts from the stock Alternator cover, shown as position Bolt 1,2 & 3. 2. Bolt 1 3. Place the Secondary Alternator Cover over the stock cover. M6x40 - 10Nm Assemble 3 replacement bolts loosely in the correct position as shown. 4. Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN. 5. Replace original plastic cover and fairing. 6. GB/ Bolt 3 M6x35 - 10Nm Bolt 2 M6x35 - 10Nm Original plastic cover that requires remova

SECONDARY CLUTCH COVER PART NO. EC-CBR1000-2008-2-GBR

1. Remove fairing.

- 2. Remove 3 existing bolts from the stock Clutch cover, shown as position Bolt 1, 2 &,3.
- 3. Place the Secondary Clutch Cover over the stock cover.
- 4. Loosely assemble bolt 3 first (2-3 turns), then bolts 1 & 2, with the replacement bolts supplied.
- 5. Tighten bolts to a Torque of 10Nm as per manufacturers recommendations. DO NOT OVERTIGHTEN.

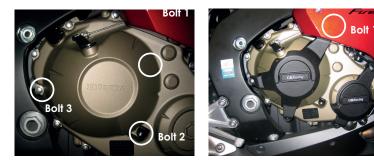

SECONDARY PULSE COVER PART NO. EC-CBR1000-2008-3-GBR

- 1. Remove offside fairing infill panel.
- Remove 4 existing bolts from the stock Pulse cover, shown as position Bolt 1, 2, 3 & 4.
 Note : Bolt 1 has a sealing washer that needs retaining for re-use later.
- Assemble one of the replacement bolts through the Secondary Pulse Cover at position 1, then re-assemble the stock sealing washer as shown below.
- 4. Place the Secondary Pulse Cover over the stock cover.
- Assemble the remaining 3 replacement bolts loosely in the correct position as shown.
- 6. Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations.
- 7. Refit offside fairing infill panel.





Bolt 3

M6x40 - 10Nm

Bolt 2 M6x35 - 10Nm

GBRad

Bolt 4 M6x40 - 10Nm

Bolt 3 M6x35 - 10Nm Bolt 1 M6x35 - 10Nm HONDA CBR1000RA Fireblade & Fireblade SP 2012-13

FITTING INSTRUCTIONS TO BE FITTED BY A QUALIFIED TECHNICIAN





SETS & BUNDLES

SET: EC-CBR1000-2012-SET-GBR: EC-CBR1000-2012-1-GBR / EC-CBR1000-2008-2-GBR / EC-CBR1000-2008-3-GBR BUNDLE: CP-CBR1000-2012-CS-GBR: EC-CBR1000-2012-1-GBR / EC-CBR1000-2008-2-GBR / EC-CBR1000-2008-3-GBR / BA12-8-GBR-SET / CGA10-GBR

www.GBRacing.eu

DO NOT use these products unless you agree to our Terms & Conditions, as shown on our paperwork and website. If you do not agree, please return the product(s) to your dealer for a refund.