


THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:

Secondary Alternator Cover Part No. EC-CBR1000RR-2020-1-GBR / Secondary Clutch Cover Part No. EC-CBR1000RR-2020-2-GBR /  
 Secondary Pulse Cover Part No. EC-CBR1000RR-2020-3-GBR / Bullet Frame Sliders Part No. FS-CBR1000RR-2020-R


**SECONDARY ALTERNATOR COVER**  
**PART NO. EC-CBR1000RR-2020-1-GBR**

1. Remove original fairing panel.
2. Remove 4 existing bolts from the stock Alternator cover, shown as position Bolt 1, 2, 3 & 4.
3. Place the Secondary Alternator Cover over the stock cover.
4. Assemble 4 replacement bolts (M6X35HHF) loosely in the correct position as shown.
5. Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations.  
 DO NOT OVERTIGHTEN.
6. Replace fairing.



**Bolt 1**  
 M6X35HHF - 10Nm

**Bolt 2**  
 M6X35HHF - 10Nm

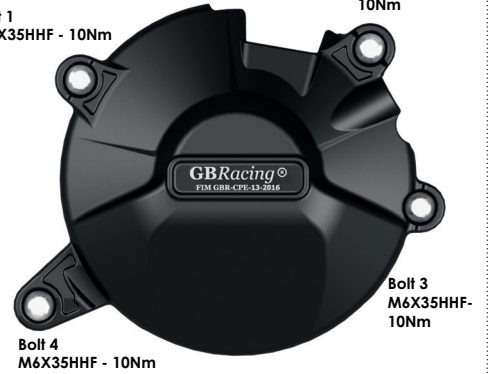


**Bolt 3**  
 M6X35HHF - 10Nm

**Bolt 4**  
 M6X35HHF - 10Nm

**SECONDARY CLUTCH COVER**  
**PART NO. EC-CBR1000RR-2020-2-GBR**

1. Remove 3 existing bolts from the stock Clutch cover, shown as position Bolt 1, 2 & 3.
2. Place the Secondary Clutch Cover over the stock cover.
3. Assemble the 3 replacement bolts loosely in the correct position as shown.
4. Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations.  
 DO NOT OVERTIGHTEN.



**Bolt 1**  
 M6x40HHF - 10Nm



**Bolt 3**  
 M6x40HHF - 10Nm

**Bolt 2**  
 M6x55HHF - 10Nm

**SECONDARY PULSE COVER**  
**PART NO. EC-CBR1000RR-2020-3-GBR**

1. Remove 3 existing bolts from the stock Pulse cover, shown as position Bolt 1, 2 & 3.
3. Place the Secondary Pulse Cover over the OEM stock cover.
4. Assemble the 3 replacement bolts loosely in the correct position as shown.
5. Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations.



**Bolt 3**  
 M6X35HHF - 10Nm



**Bolt 1**  
 M6X35HHF - 10Nm

**Bolt 2**  
 M6X35HHF - 10Nm

**BULLET FRAME SLIDER - LEFT HAND SIDE - RACE**  
**PART NO. FS-CBR1000RR-2020-LHS-R**

**Note: Fairing Requires No Modification**

1. Remove lower engine / frame mounting bolt.
2. Assemble bolt through the aluminium bush into correct position.
3. Tighten to 64NM torque.
4. Slide bullet moulding onto aluminium bush.
5. Screw M6 bolt into front of bullet moulding hand tight.

PLEASE NOTE: These are only sold separately and are not available in our Bundles.



**BULLET FRAME SLIDER - RIGHT HAND SIDE - RACE**  
**PART NO. FS-CBR1000RR-2020-RHS-R**

**Note: Fairing Requires No Modification**

1. Remove lower engine / frame mounting bolt.
2. Assemble bolt through the aluminium bush into correct position.
3. Tighten to 64NM torque.
4. Slide bullet moulding onto aluminium bush.
5. Screw M6 bolt into front of bullet moulding hand tight.

PLEASE NOTE: These are only sold separately and are not available in our Bundles.

