
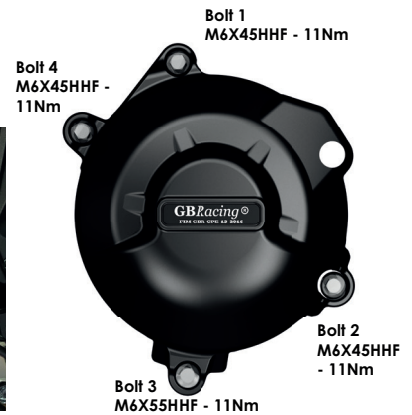


THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:

Secondary Alternator Cover Part No. EC-Z650-2017-1-GBR / Secondary Clutch Cover Part No. EC-Z650-2017-2-GBR /
Secondary Pulse Cover Part No. EC-Z650-2017-3-GBR

SECONDARY ALTERNATOR COVER PART NO. EC-Z650-2017-1-GBR



1. *For Model Ninja 650 Only:* Remove nearside lower belly panel. The lower part of the main fairing panel will need to be loosened to allow for access to Bolt 4 in terms of its removal and replacement.
2. Remove 4 existing bolts from the stock Alternator cover, shown as position Bolt 1, 2, 3 & 4.
3. Place the Secondary Alternator Cover over the stock cover.
4. Assemble 4 replacement bolts loosely in the correct positions as shown.
5. Tighten bolts to a Torque of 11Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN.
6. *For Model Ninja 650 Only:* Replace lower belly panel.



SECONDARY CLUTCH COVER PART NO. EC-Z650-2017-2-GBR

1. Remove 4 existing bolts from the Clutch cover, shown as position Bolt 1, 2, 3 & 4. *Please note: Fairing around Bolt 1 just needs lightly pushing to get to Bolt 1 (see Fig.1).*
2. Place the Secondary Clutch Cover over the stock cover.
3. Assemble 4 replacement bolts M6X35HHF loosely in the correct position as shown.
4. Tighten bolts to a Torque of 11Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN.

Fig.1

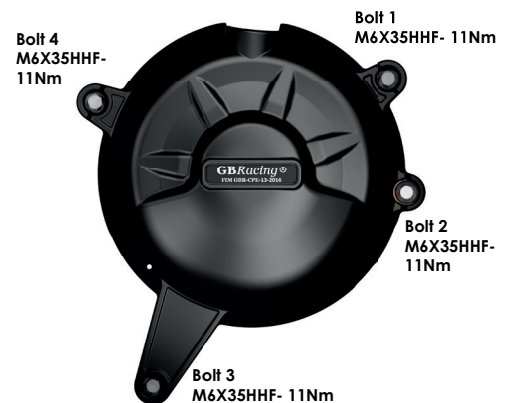

SECONDARY PULSE COVER PART NO. EC-Z650-2017-3-GBR

1. Remove Lower Fairing Bolt - see Fig.1
2. Remove 3 existing bolts from the Pulse cover, shown as position Bolt 1, 2, & 3
3. Place the Secondary Pulse Cover over the stock cover. Assemble 3 replacement bolts - M6X30HHF loosely in the correct position as shown.
4. Tighten bolts to a Torque of 11Nm as per Manufacturer's recommendations.
5. Replace Lower Fairing Bolt. DO NOT OVERTIGHTEN.

Fig.1

